






IM-130ANE-HC / IM-130ANE-HC-23 CUBE ICE MAKERS



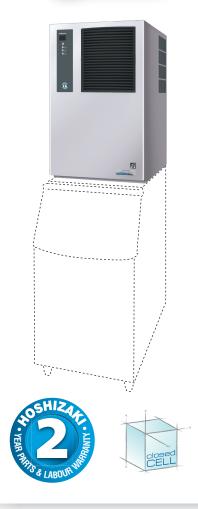





R290

Key Features

The IM-130ANE-HC and IM-130ANE-HC-23 are modular cube ice makers, which utilise Natural Refrigerant R290.



- Members of the Emerald Class, Hoshizaki's new range of climate friendly ice makers.
- Can produce up to 125 kg of cube ice per 24 hours respectively (AT.10°C.WT.10°C).
- Unique ice making system that has an automatic rinse cycle. After every new batch of ice, the water reservoir drains and refills with fresh water. System comes with a magnetic water pump that has no direct coupling, which prevents any leakage.
- Closed water circuit offers the ultimate contamination protection, by reducing the number of points at which impurities can enter the ice making process.
- Electronically controlled to ensure an optimised ice making process under varying circumstances without the need for physical adjustments. Quality of ice is always consistent.
- Easily cleanable air filter allows end-users to carry out routine cleaning schedules. Extends product life expectancy and reduces the frequency and costs of maintenance call-outs.
- Stainless steel exterior with integrated door handles provides a hygienic and high quality finish.
- Based on Internal comparative study. Please contact your local sales branch to find out more.





IM-130ANE-HC-23 Ice: Cube (M) **Size:** Approx. 28 x 28 x 32mm **Size:** Approx. 28 x 28 x 23mm



Available Models

| Model | Air Cooled | Water Cooled |
|-----------------|------------|--------------|
| IM-130ANE-HC | ✓ | |
| IM-130ANE-HC-23 | ~ | |

Bins

| Model | Type of Bin | Max. Bin Capacity approx. | |
|-------------------------------------|-------------|---------------------------|--|
| B-301SA | Modular | 144kg | |
| B-501SA, Top Kit - TK 8 D | | 217kg | |
| B-801SA, Top Kit - TK 8 D + TK 18 D | | 348kg | |

Production

| Model | Ice Production per 24h approx. | Temperature | Ice Production per Cycle approx. | Water Consumption per 24h approx. |
|-----------------|--------------------------------|--|----------------------------------|--------------------------------------|
| IM-130ANE-HC | 125kg 110kg 95kg | AT.10°C, WT.10°C AT.21°C, WT.15°C AT.32°C, WT.21°C | 1.8kg / 80 pcs | 0,52m³ 0,23m³ 0,20m³ |
| IM-130ANE-HC-23 | 100kg 95kg 83kg | AT.10°C, WT.10°C AT.21°C, WT.15°C AT.32°C, WT.21°C | 1.3kg / 80 pcs | 0,66m³ 0,30m³ 0,24m³ |

For more information visit our website at www.hoshizaki-europe.com










IM-130ANE-HC / IM-130ANE-HC-23 CUBE ICE MAKERS

Leading Naturally

CAD drawings available on our website

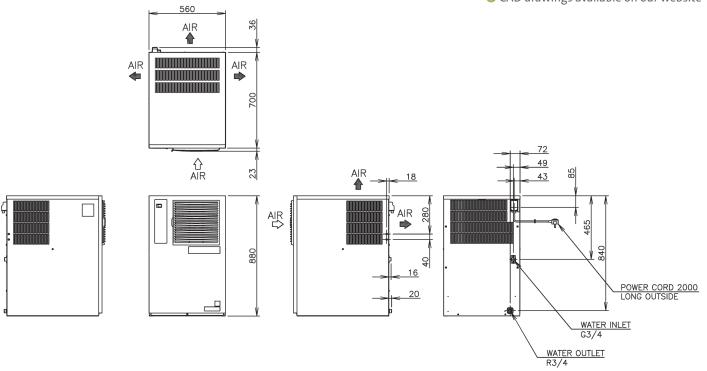

Specifications

| | IM-130ANE-HC | IM-130ANE-HC-23 |
|---|-----------------|-----------------|
| Dimensions W x D x H (mm) | 560 x 700 x 880 | 560 x 700 x 880 |
| AC Supply Voltage | 1/220-240V 50Hz | 1/220-240V 50Hz |
| Electric Consumption (AT.32°C, WT.21°C) | 635W | 635W |
| Heat Rejection (AT.32°C, WT.21°C) | 1310W | 1310W |
| Refrigerant Charge | R290/110g | R290/110g |
| Isolation | Polyurethane | Polyurethane |
| Weight Gross / Net | 79kg / 68kg | 79kg / 68kg |

Operation Requirements

| Ambient Temperature | 1-40°C |
|--------------------------|--------------------------------|
| Water Supply Temperature | 5 - 35°C |
| Water Supply Pressure | 0,7 - 7,8 bar (0,07 - 0,78MPa) |
| Voltage Range | Rated Voltage ± 6% |

Accessories

| Ice chute | Ī |
|------------------|---|
| Scoop | 1 |
| Installation Kit | 1 |



Export EMEA

Keienbergweg 50 C/D 1101 GC Amsterdam The Netherlands T: +31 (0)20 6918499 F: +31 (0)20 6918768 sales@hoshizaki.nl www.hoshizaki-europe.com T: +44 (o)132 261 6900 F: +44 (o)132 261 6901 info@gramuk.co.uk www.gramuk.co.uk

Hoshizaki Europe B.V. Headquarters

Keienbergweg 50 C/D 1101 GC Amsterdam The Netherlands T: +31 (0)20 6918499 F: +31 (0)20 6918768 www.hoshizaki-europe.com www.gram-commercial.com